

# BAYPORT 41 & BAYPORT 36

DIRECT VENT GAS FIREPLACES

Bayport 36 Traditional Log shown with a Full Rectangle Screen Front and Black Glass panels



QUALITY FIREPLACES FOR LIFE.

**KOZY**  **HEAT**  
FIREPLACES

# BAYPORT SERIES

## Safety Screen Fronts

Sizes shown below: Bayport 41 / Bayport 36




**Rectangle Screen Front**  
with optional Black Glass panels  
*Screen Front available in Black*



**Rectangle Full Screen Front**  
with Black Enamel panels  
*Screen Front available in Black, Brushed Stainless*



**Rectangle Full Screen Front**  
in Antique Copper Overlay with  
the Beach Accent Kit with Black  
Enamel panels  
*Screen Front available in  
Antique Copper, Brushed Nickel*

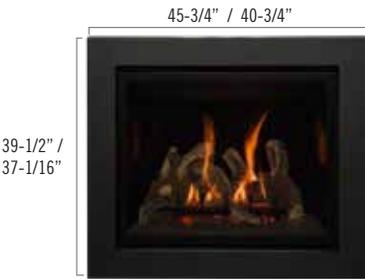

**Portrait Screen Front\***  
with optional Black Glass panels  
*Screen Front available in Black*



**Prairie Screen Front**  
with optional Masonry refractory  
*Screen Front available in Black*



**Arched Prairie Full Door**  
with optional Black Glass panels  
*Screen Front available in Black*

*\*Bayport 41: Safety screen requires the fireplace to be 2-1/4" above the hearth and 3" clearance from the outside edge to a sidewall.  
\*Bayport 36: Safety screen requires the fireplace to be 3" above the hearth and 3" clearance from the outside edge to a sidewall.*



**Arched Mission Screen Front**  
in Vintage Bronze with Herringbone refractory  
*Screen Front available in Vintage Bronze*



**Mission Screen Front**  
in Vintage Bronze with Traditional Brick refractory  
*Screen Front available in Vintage Bronze*



Bayport 41 Glass shown with a Portrait Screen Front, Glacier Crystal glass, Black Enamel panels and Beach Accent Kit

# BAYPORT SERIES

## Media & Refractory/Panel Options



Log Set with Traditional Brick refractory



Birch Set with Masonry refractory



Log Set with Black Glass panels



Crushed Glass with Enamel panels



Driftwood/Rock  
*(Optional Accent Media with Glass)*



Beach Accent Kit  
*(Optional Accent Media with Glass)*

Bayport 41 Birch Logs shown with a Prairie  
Screen Front and Masonry refractory



## BAYPORT SERIES

### Refractory Options



Traditional Brick



Enamel



Black Glass



Herringbone



Masonry

*Standard Black firebox*



Bayport 41 Traditional Logs shown with a Full Rectangle Screen Front and Masonry refractory

## Glass Media

### Crushed Glass



Reflective Midnight



Reflective Copper

### Crystals



Glacier



Amber



Black



Seabreeze

## Burn Videos



Bayport 41 Log



Bayport 41 Glass with Beach Accent Kit



Bayport 41 Birch Log



Bayport 36 Black Glass Log



Bayport 36 Brick Log



Bayport 36 Birch Log



Bayport 36 Masonry Log




Bayport 36 Glass with Beach Accent Kit

# BAYPORT SERIES

The Bayport is available with traditional or birch log sets, or a contemporary glass media model. These models contain an IPI valve system and full-function remote control. The Bayport 36 & 41 with traditional logs are also available with a millivolt standing pilot system.

## Specifications

### Bayport 41

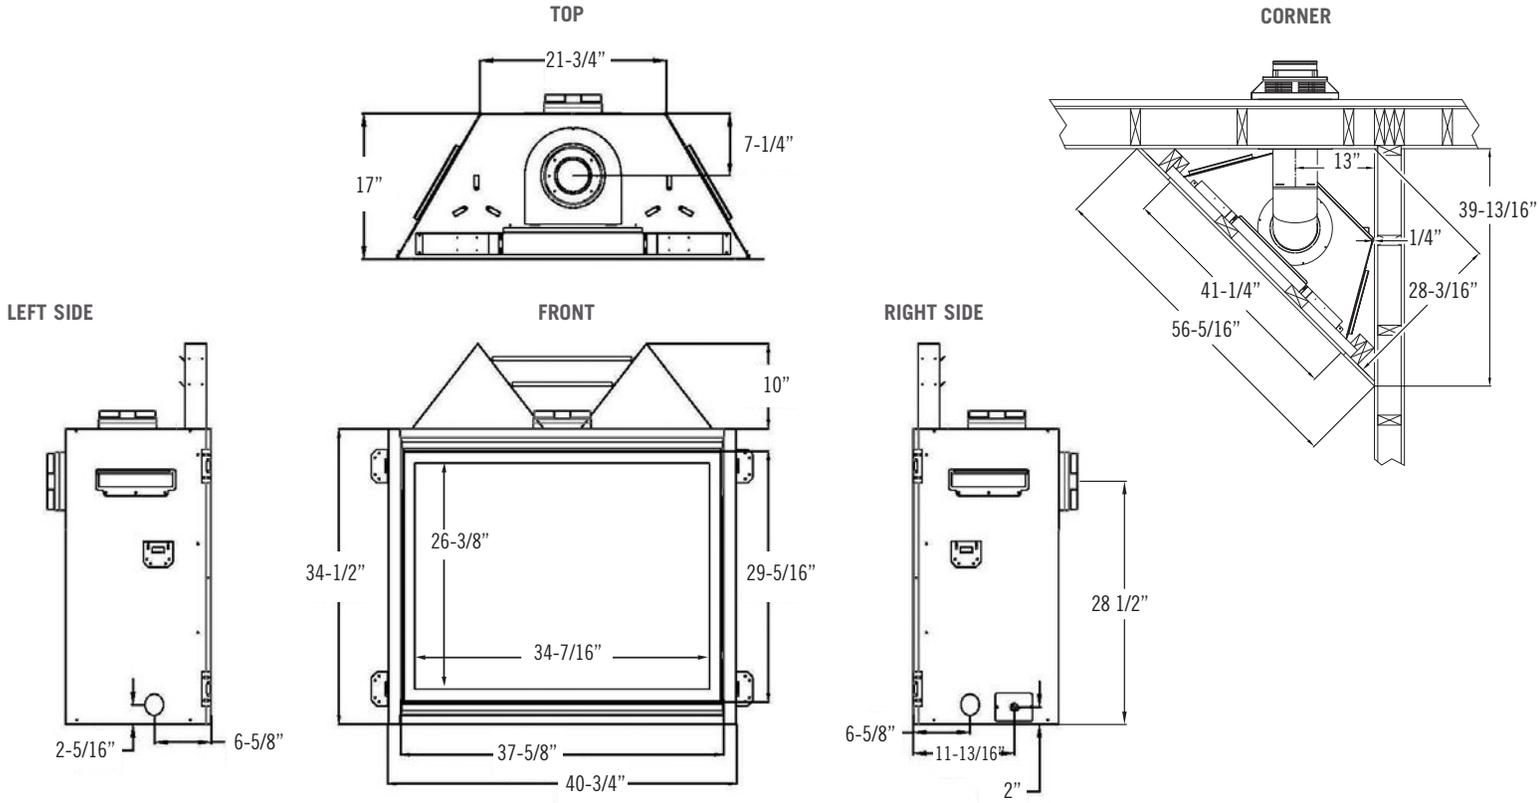

### Clearances

Model	Bayport 41	Bayport 36
Mantel 6" deep from appliance top	9"	8"
Mantel 6" deep from appliance top for RSF-2 ONLY	5"	5"
Top of appliance to 3/4" Trim	5-1/2"	4-1/2"
Top of appliance to 3/4" Trim for RSF-2 ONLY	1-1/2"	1-1/2"
From appliance left and right side stand-off	0"	0"
From appliance back stand-offs	0"	0"
From appliance corners	1/4"	1/4"
From appliance front	36"	36"
From appliance top to ceiling	31"	30"
Appliance sides to adjacent sidewall	1"	3/4"

Model	Bayport 41	Bayport 41 MV	Bayport 36	Bayport 36 MV
<b>Height</b>	34-1/2"	34-1/2"	32"	32"
<b>Width</b>	40-3/4"	40-3/4"	35-3/4"	35-3/4"
<b>Depth</b>	17"	17"	15-13/16"	15-13/16"
<b>Weight</b>	199 lbs.	199 lbs.	178 lbs.	178 lbs.
<b>Viewing Area</b>	34-7/16" X 26-3/8"	34-7/16" X 26-3/8"	29-7/16" X 23-7/8"	29-7/16" X 23-7/8"
<b>BTU NG High / Low</b>	30,000 / 15,000	28,500 / 21,500	26,500 / 14,000	26,500 / 17,500
<b>BTU LP High / Low</b>	30,000 / 15,000	28,500 / 21,500	26,500 / 14,000	26,500 / 21,000
<b>ENERGUIDE P.4 NG / LP</b>	76.16% / 76.77%	76.16% / 76.77%	66.61% / 71.09%	65.52% / 70.12% (MV)
<b>Steady State NG / LP</b>	77.96% / 78.04%	77.96% / 78.04%	71% / 75%	71% / 75%
<b>AFUE % NG / LP</b>	72.19% / 72.16%	72.19% / 72.16%	70% / 74%	70% / 74%
<b>Valve System</b>	IPI	Millivolt	IPI	Millivolt
<b>Black Enamel Panel</b>	Standard (BAY 41-G)	N/A	Standard (BAY 36-G)	N/A
<b>Optional Refractory/Panels</b>	Black Glass Herringbone Brick Traditional Brick Masonry Panels (BAY 41-MV, BAY 41-L & BW)		Black Glass Herringbone Brick Traditional Brick Masonry Panels (BAY 36-MV, BAY 36-L & BW)	
<b>Accent Light Kit</b>	Standard (BAY 41-G)	N/A	Standard (BAY 36-G)	N/A
<b>Ember Light Kit</b>	Standard (BAY 41-L & BW)	N/A	Standard (BAY 36-L & BW)	N/A
<b>Glass Media</b>	Required (BAY 41-G)	N/A	Required (BAY 36-G)	N/A
<b>Accent Media</b>	Optional Beach Accent Kit or Driftwood Rock (BAY-41 G)	N/A	Optional Beach Accent Kit or Driftwood Rock (Bay 36-G)	N/A
<b>Ceramic Glass</b>	Standard		Standard	
<b>Fan Kit Availability</b>	Standard (BAY 41-L & BW) Optional (BAY 41-G)	Optional	Standard (BAY 36-L & BW) Optional (BAY 36-G)	Optional
<b>Finishing Trim Kit</b>	Standard		Standard	
<b>Screen Front</b>	Required		Required	


### Each unit factory tested

Refer to the installation manuals for complete installation & venting requirements. See additional mantel clearance configurations in the installation manual.

Note: Over time, antique copper will react with oxygen, heat, and other aspects of the environment and naturally change color, or patina.


Features, Options & Specifications are subject to change.

## Bayport 36

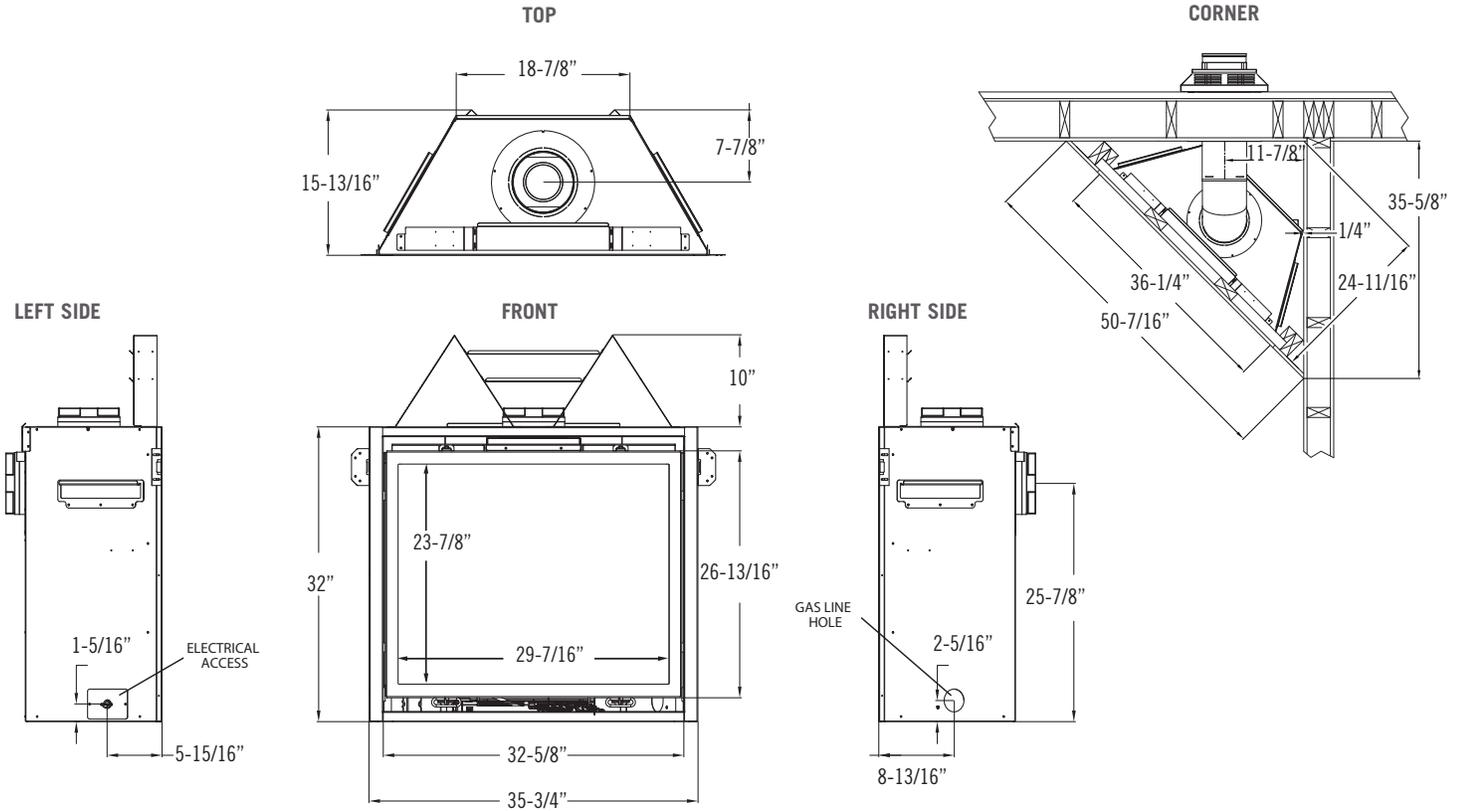


## Outdoor Covered Fireplace Install

- Fireplace operation is approved from 40 degrees F to 110 degrees F
- All wiring connections shall be in accordance with outdoor requirements of NECA NFPA 70
- All clearances and requirements in your appliance manual must be adhered to

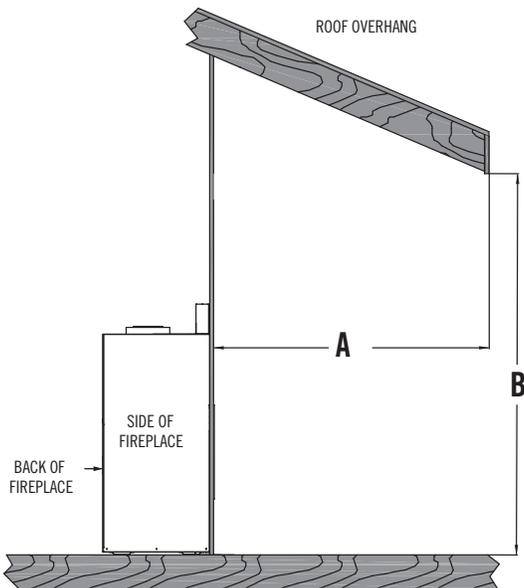

The overhang (A) must be a minimum of 1/2 or greater of the roofline elevation (B) above the base of the fireplace.

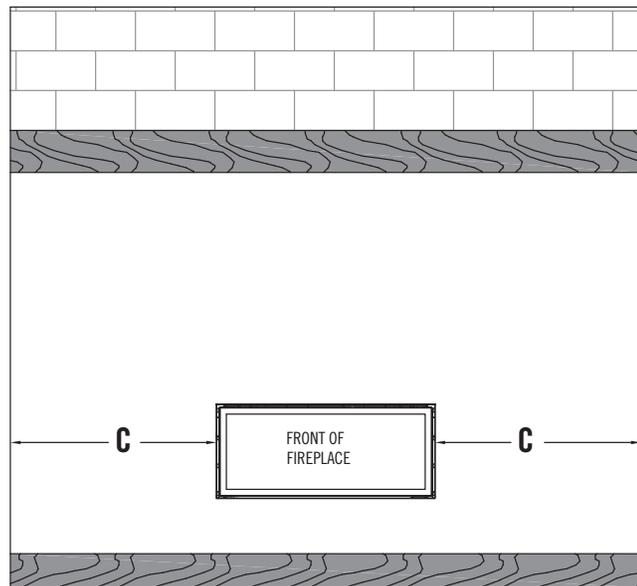

The width of the overhang to each side of the appliance (C) must be a minimum of 1/2 or greater of the roofline elevation (B) above the base of the fireplace.

**EXAMPLE:** If roofline (B) is 10 ft. above the base of the fireplace, the overhang (A) must be 5 ft. or greater. The width of the overhang to EACH side of the fireplace (C) must be 5 ft. or greater.



Bayport 36 Log shown with a Rectangle Full Screen Front with an Antique Copper overlay and Black Glass panels

*Fireplace brochures are for advertising purposes only. Refer to the specific fireplace manual for installation.*

# BAYPORT SERIES

## Accessories & Controls



# KOMFORT KONTROL

The Komfort Kontrol remote gives you the ability to bring comfort and green technology all together into your home. With the Komfort Kontrol remote, all you have to do is decide a comfortable set point temperature on your remote and when the room temperature gets closer to the point you desire, the Komfort Kontrol remote will turn the flames down accordingly! And with our zone heating, you can save energy and enjoy time in the room you use the most by just turning down the central heat, setting your Komfort Kontrol remote, and enjoy your time around the fireplace with friends, family, or just a good book! That way you'll get to have heat where and when you need it while saving energy and money with just a click of the Komfort Kontrol remote!

### Remote control features:

-  Thermostat function
-  Light kit modulation
-  Flame height modulation
-  IPI to continuous pilot
-  Fan speed modulation

## Millivolt Option Controls



Thermostat Remote or Deluxe On/Off Remote



Wired or Wireless Wall Mount Thermostat



Wireless wall switch

In order to continually provide the highest quality product available, features/options, specifications & dimensions are subject to change. Refer to the unit installation manual for complete installation instructions. Installation must conform with local building codes. **In some regions it may be possible that this appliance qualifies for an energy rebate. See your local dealer for details regarding promotions and qualifications.**

Manufactured by Hussong Mfg. Co., Inc.  
204 Industrial Park Road, Lakefield, MN 56150  
Phone 1-800-253-4904 [www.kozyheat.com](http://www.kozyheat.com) 8-21



Product Line:



**For complete information on the Kozy Heat product line, please contact us at:**

**FOR CALIFORNIA RESIDENTS ONLY**  
**⚠ California Proposition 65 Warning**

**WARNING:** This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel combustion, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).